




1905 MHz Band Pass Filter

P/N AUI-08-1905-50

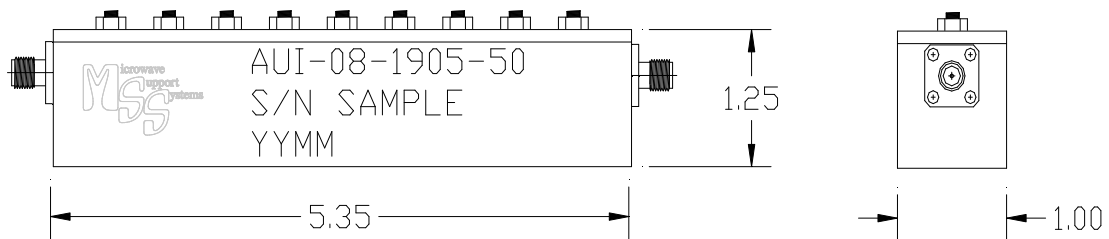

Specification

<i>Parameter</i>	<i>Units</i>	<i>Minimum</i>	<i>Typical</i>	<i>Maximum</i>
Center Frequency	MHz	-	1905	-
Signal Bandwidth (1 dB BW)	MHz		50	-
-3db Bandwidth	MHz	60	-	-
-30db Bandwidth	MHz	128	-	-
Insertion Loss @ fc	dB	-		0.7
Insertion Loss over Signal BW	dB			0.8
Return loss, input, output	dB	14 min.	15	-
Impedance, input, output	ohms	-	50	-
Operating temperature range	°C		-30 to +85	
Connectors	-	SMAF		
Mounting Holes	-	4-40 Tap 4-Places		
Size	inch	5.35"X1.25"X1.00"		